




- CE, EN 14055 Quality certificate
- Supporting frame for drywall application, tested at 400 kg (EN 997).
- Dual flush concealed cistern, 80 mm
- Adjustable Dual Flush;
Full Flush: 4 L to 6 L
Half flush: 2 L to 3 L
- Successful leakage and pressure tests, Styrofoam insulation against condensation.
- Pre-assembled discharge elbow Ø 90 mm with reducer Ø 100 or Ø110 mm.
- Silent hydraulic fill valve (16 dB) - EN 14124, Class I
- Tested to 200,000 cycles (EN 14055)
- NF certified filling valve
- 5 years guarantee, except rubber parts
- Without control plate
- All concealed cisterns are compatible with sensor panel (SENSE) alternatives

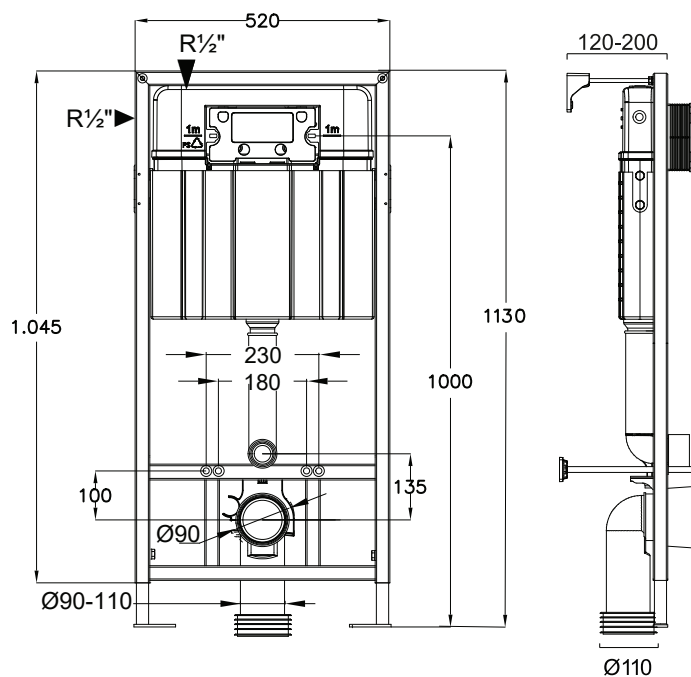

**5 YEARS
WARRANTY**